

Proximity Card Reader with USB Interface

Component : K8019



2 Tags included
part # HAA2866/TAG




optional access badge
part # HAA2866/TAG2



Features

- store up to 250 tags.
- with USB interface for tag config-management.
- free tag management application for PC.
- fully documented protocol, write your own application.
- tags can also be entered using a 'mastercard'.
- toggle or pulse NO/NC relay output.
- adjustable pulse time: 1s to 4 min. approx.
- 3 status leds and buzzer.
- Works stand alone.

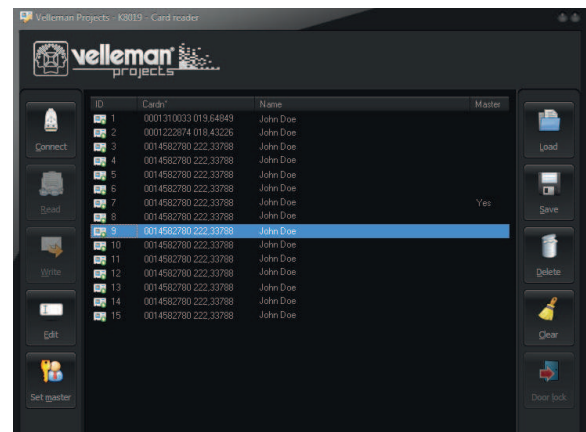


K8019 Card reader software



Specifications

- EM4100 compatible: HAA2866/TAG, HAA2866/TAG2.
- relay contact: 3A/24VDC.
- power supply: 12VDC or 5VDC (USB)*
- power consumption: 100mA max.
- dimensions: 69x80x47mm / 2.71x3.15x1.85"



USB cable
included

*Only for configuration and tag learning. Relay will not operate.

